

Resfab

Engineering Has a Name

LM-24A



LM-48A

Resfab Inc.

Tel.: (450) 359-0800

Fax: (450) 359-0296

Toll Free 1-866-359-0808

info@resfab.com

April 2005

Resfab

www.resfab.com

Rotisserie are shown with optional curve glass. LM-24A shown with optional stand RS-24.

Features



- Side drawer for spits, tools, gloves, seasoning, spare parts etc.



- Choice of 6, 7 or 8 spits drive for maximum production, according to the chicken size.



- 3 parts, 3-step rotor assembly with the unique Resfab Autolock Rotor System™ no loose or moving parts.



- All movable parts fit in the grease pan for easy transportation to wash area or for soaking.



- Choice of angle or piercing spits (non coated).



- Drain directly in a container.

- Cook and hold electronic controller.
- Rotating & cooking automatically stop when door is open.
- Jog switch for easy loading and unloading.
- 100% convection avoiding the costly infrared light heater.
- Pass thru.
- 100% high gage stainless steel.
- Easy access on all components for fast and safe servicing.

Options



- Full pan staging drawer for easy loading and unloading.



- Staging drawer holds up to 4 full pans.



- Staging drawer quick dismantling for sanitation.



- Meat probe for instant food temperature reading. Mounted on the inside of the storage drawer for maximum protection.



- Heavy duty non stick coating for rotors, shaft and drip trays.



- Basket for chickens, chicken pieces, turkey breast, roast, ribs, etc.



- Heavy duty non stick coating on spits and baskets.

- Curved Euro glass for prestigious look.
- Multi program controller.
- Solid back.
- 4 inches legs, 6 inches legs.
- Heavy duty stand with casters.
- Spit rack for staging.

Technical

Capacity Chickens

Rotor Configuration	6 spits	7 spits	8 spits
Angle - spit	18 up to 4 ^{1/2} lb.	21 up to 4 lb.	24 up to 3 ^{1/2} lb.
Piercing spit	24 up to 3 ^{1/2} lb. 30 up to 2 ^{3/4} lb.	28 up to 3 lb. 35 up to 2 ^{1/2} lb.	40 up to 2 ^{1/2} lb.
Basket	18 up to 4 ^{1/2} lb.	21 up to 4 lb.	N/A


Electrical

208 V, 3 phases, 50/60 Hz.	8,000 Watts 28 Amp.
240 V, 3 phases, 50/60 Hz.	8,000 Watts 24 Amp.
208 V, 1 phase, 50/60 Hz.	8,000 Watts 39 Amp.
240 V, 1 phase, 50/60 Hz.	8,000 Watts 34 Amp.

- Lighting: 2 halogen lamps of 200 Watts each for perfect customer view.

Rotisserie LM-48A

- Specifications are the sum of two LM-24A model specification.

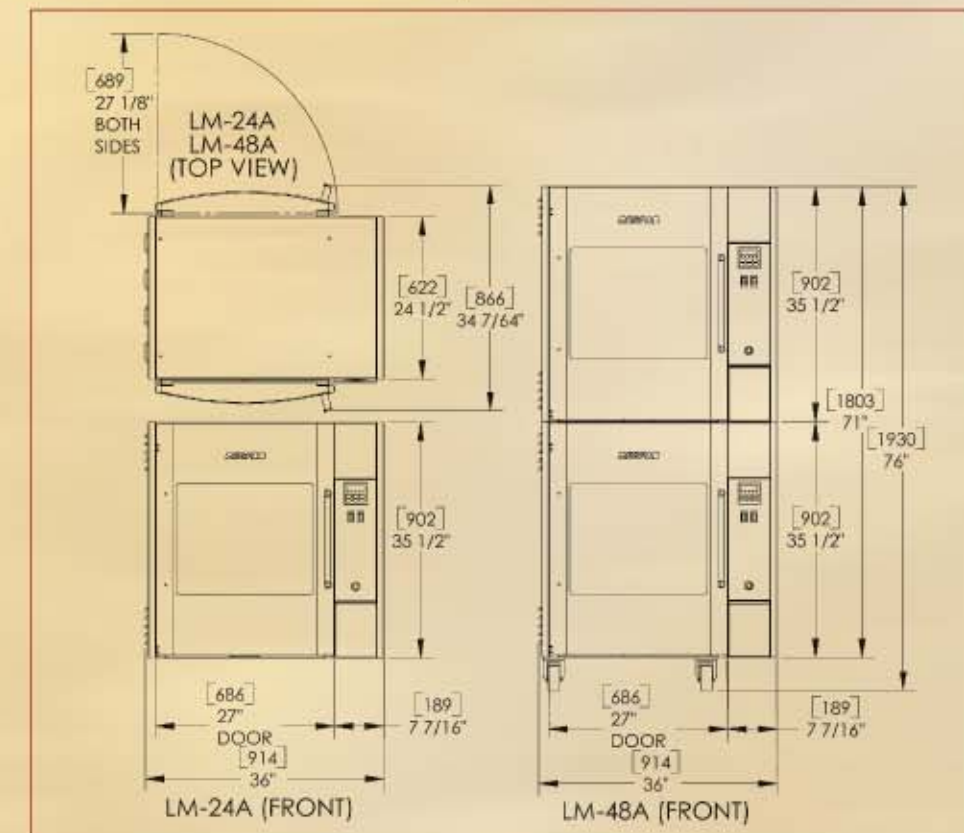

Note: These specifications are subject to change without notice.